




telematic antenna | 2J050


reference

2J050

frequency	AMPS (824-894) MHz / GSM (900MHz) PCN (1800MHz) / DCS (1900MHz) UMTS (2,1GHz) / WIFI, BLUETOOTH (2,4Ghz)
vswr	<2,5:1
impedance	50 Ohms
polarisation	vertical
gain	2.2 dBi Max
connector	SMA Male
working temperature	-40°C to +85°C
size	54mm x 6,7 - 9,65mm

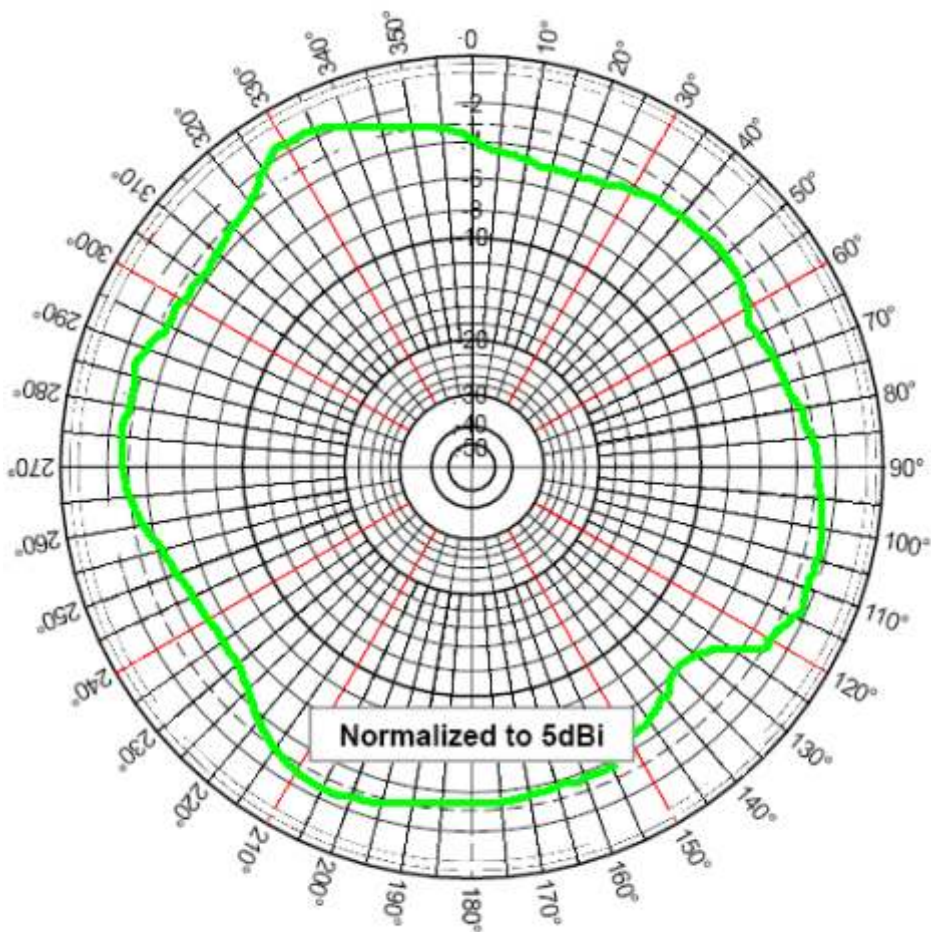

Azimuthal Pattern (X, Y or E-Plane)

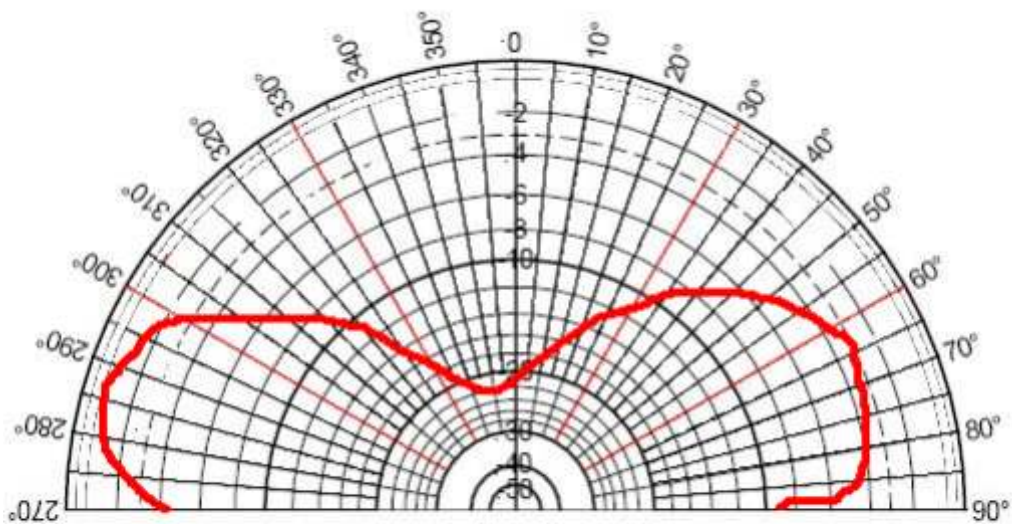

Elevation Pattern (Z, Y or H-Plane)