

LoRa Stabantenne RP-SMA-M (DATASHEET)

Type	ISM antenna
Frequencies	ISM (868 MHz)
Mounting	Telematic Mount
Revision	00



1. PRODUCT SELECTOR

868MHz

LoRa Stabantenne RP-SMA-M SMA male RP with plastic cover (black)
SMA male RP (nickel plated)


2. SPECIFICATION

2.1. Electrical Specifications


Frequencies	ISM (868 MHz)
Impedance	50 Ohms
Polarization	Linear
Gain	2dBi Ave.
VSWR @ 868MHz	<1.5:1
Operating temperature	-40°C to +85°C

2.2. Mechanical Specifications and Dimensions


Material: ABS
Max. dimensions: 10mm x 113mm(depends on connector size) (D x H)
Weight: 13 g
Colour: Black (for different colours please ask our sales team)

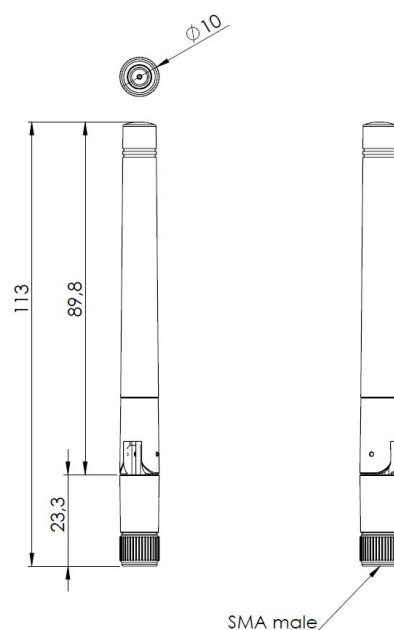


3. MEASUREMENT

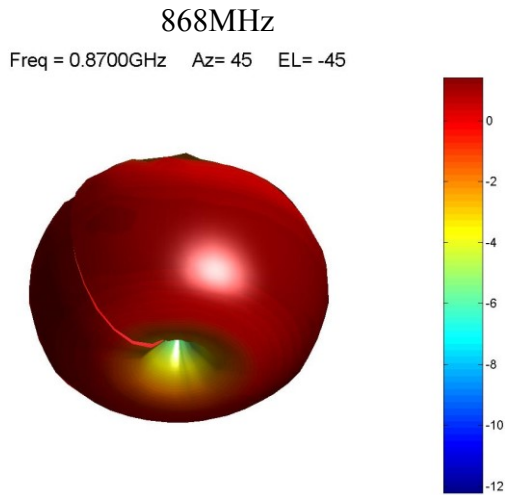

Log Mag (Penta band)

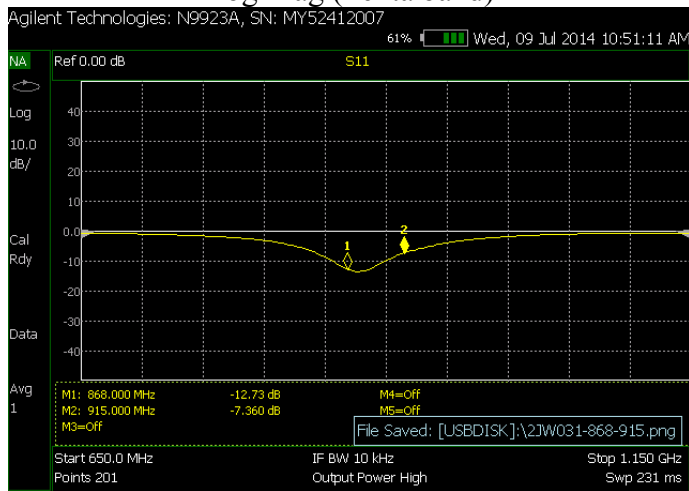

VSWR (Penta band)

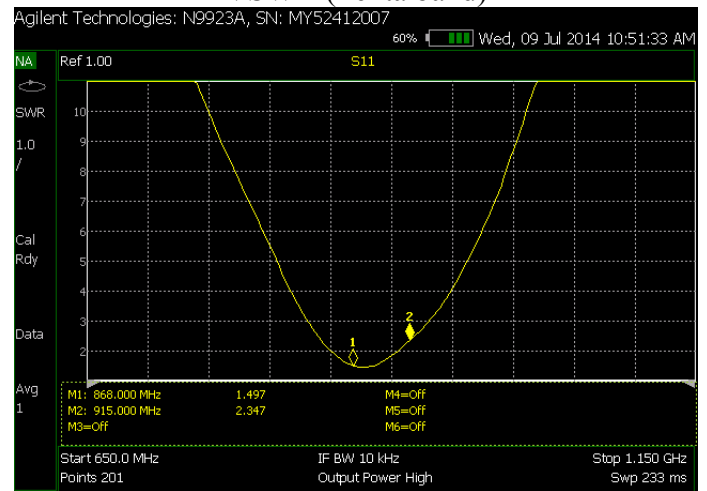

we make
your business
wireless



4. IMAGES

