

 Batteries included

Description

MClimate CO2 Sensor and Notifier is a device that uses NDIR technology to measure the actual CO2 and has built-in temperature and humidity sensors. The device also has acoustic and visual notification abilities to indicate occupants whether a room should be ventilated.

SKU: MC-LW-CO2-01-BI

Product features

- CO2 Sensor (NDIR)
- Temperature Sensor
- Humidity Sensor
- RGB LED
- Acoustic Buzzer
- 2xAA Power supply
- Ultra-low power consumption

Applications

- Smart Buildings
- Smart Home
- Residential buildings
- Commercial buildings
- Environment monitoring

Device specifications

Mechanical specifications

| | |
|-----------------------------|--------------|
| WEIGHT | 68gr |
| DIMENSIONS | 80x80x19mm |
| ENCLOSURE | ABS |
| BUZZER SOUND PRESSURE LEVEL | 80dB at 10cm |

Operating conditions

| | |
|-------------|---------------------------|
| TEMPERATURE | 0 - +50°C |
| HUMIDITY | 0-80% RH (non-condensing) |

Power supply

| | |
|-----------------------|---|
| BATTERY TYPE | 2xAA (1,5VDC) (included in the device) |
| OPERATING VOLTAGE | 3VDC |
| EXPECTED BATTERY LIFE | < 10 years (depending on configuration and environment) |

Radio/Wireless

| | |
|----------------------------|---|
| WIRELESS TECHNOLOGY | LoRaWAN® 1.0.3 |
| WIRELESS SECURITY | LoRaWAN® End-to-End encryption (AES-CTR) |
| LORAWAN DEVICE TYPE | Class A End-device |
| SUPPORTED LORAWAN FEATURES | OTAA, ADR, Adaptive Channels setup |
| SUPPORTED LORAWAN REGIONS | EU863 – 870; Other LoRaWAN regional settings available upon request |
| LINK BUDGET | 130dB |
| RF TRANSMIT POWER | 14dB |

Data types

| KEEPALIVE | TYPE VALUE | VALUE NAME | DATA SIZE | NOTES |
|-----------|------------|---------------------------------|-----------|---|
| | 0x00 | Reason to send message + status | 1 | Possible reasons: Keepalive; Device test switches |
| | 0x01 | Battery voltage | 1 | |
| | 0x02 | CO2 MSB reading | 1 | |
| | 0x03 | CO2 LSB reading | 1 | |
| | 0x04 | Temperature reading | 1 | |
| | 0x05 | Humidity reading | 1 | |


LIST OF FUNCTIONS FROM THE PROTOCOL DOCUMENTATION

- Configure RGB LED notification thresholds
- Activate RGB LED (different modes available)
- Configure acoustic buzzer notifications thresholds
- Activate acoustic buzzer (different modes available)
- Recalibrate CO2 sensor
- Change up-link messages types
- Write keepalive period

Sensors

Temperature


| | |
|------------|--------|
| RESOLUTION | 0,18°C |
| ACCURACY | ±0,2°C |

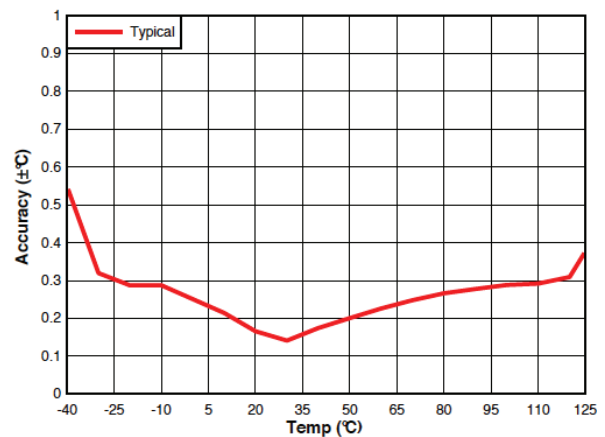

Humidity

RESOLUTION 0.39%RH

ACCURACY 2%RH

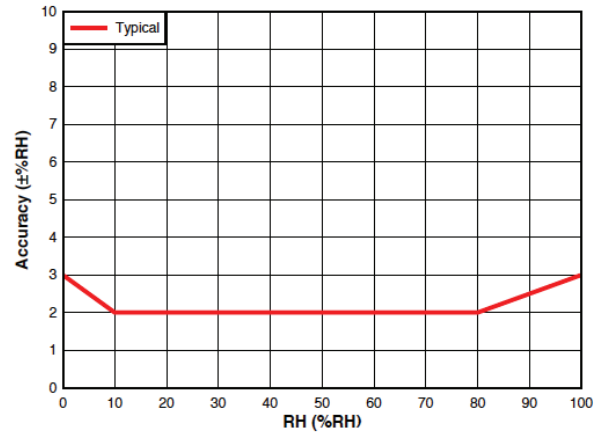

CO2

ACCURACY ±3% or 30 ppm at 25°C

RANGE 0-5000ppm

TECHNOLOGY NDIR

PEAK CONSUMPTION 15mA