

KONA Enterprise IoT Gateway

Highly Optimized Cost-Effective Gateway for Enterprise Deployments

The **KONA Enterprise IoT Gateway** is very compact and lightweight, comes with integrated Cat-6 3G/4G modem and Ethernet backhaul. The LoRaWAN, 3G/4G and GPS antennas are integrated within the enclosure. For remote applications and extra flexibility it also supports optional external LoRaWAN and 3G/4G Antennas.

- Outdoor Network Coverage
- In-building Networks
- Warehouses
- Commercial Farming
- University Campuses
- Multi-building Complex
- Parkades
- Medium Sized Private Developments



Key Software Features

- » Access Control Management
- » Cellular Parameter Configuration
- » Radio Configuration and Control
- » Remote Software Upgrades
- » Active and Passive Image Management
- » DHCP v4 Client
- » TFTP Server
- » HTTP Server
- » Firewall and Access Lists

Key Hardware Features

- » US915, EU868, AU915, AS923 ISM Bands
- » Time Duplex 8 Rx / 1 Tx
- » Integrated Cellular 3G / 4G Modem
- » Built-in LoRaWAN, 3G/4G & GPS Antennas
- » Optional external LoRaWAN and 3G/4G Antennas
- » IP67 Design
- » IEEE 802.3af PoE or Passive PoE at 37 to 57 VDC
- » Pole, Wall, Tower Building DIN Rail Mounting Options

KONA Enterprise IoT Gateway

Highly Optimized Cost-Effective Gateway for Enterprise Deployments

Technical and Functional System Specifications

Mechanical Parameters

MTBF	450,000 hours
DC Power Consumption	4.5 W (Typical)
Operational Temperature	-40°C to +60°C
Operational Humidity	10% to 100% Condensing
Ingress Protection	IP67
Size	145.8 x 178.8 x 79.5 mm
Weight	1.2 kg
Volume	2.5 L

Interfaces


Ethernet Backhaul	RJ-45 (10/100 BaseT)
Cellular Backhaul (3G/4G)	Internal with optional External
LoRa Antenna	N-Type
Power	802.3af PoE or Passive PoE at 37 to 57 VDC

LoRa Radio Parameters

ISM Bands	US915, EU868, AU915, AS923, MA869-870
Tx Power	14 dBm to 27 dBm
Rx Sensitivity	-139.5 dBm (SF12, 293 bits/sec)
Rx Noise Figure	2.5 dB
Rx Linearity	-5 dBm
Rx Dynamic Range	70 dB Analog, 100+ dB Digital

Regulatory Compliance

Safety	UL / CSA / EN / IEC 62368-1
Regulatory	FCC: 15.247, 15.109, 15.209
	ISED: RSS - 247, RSS - Gen
	CE: RED 2014/53/EU

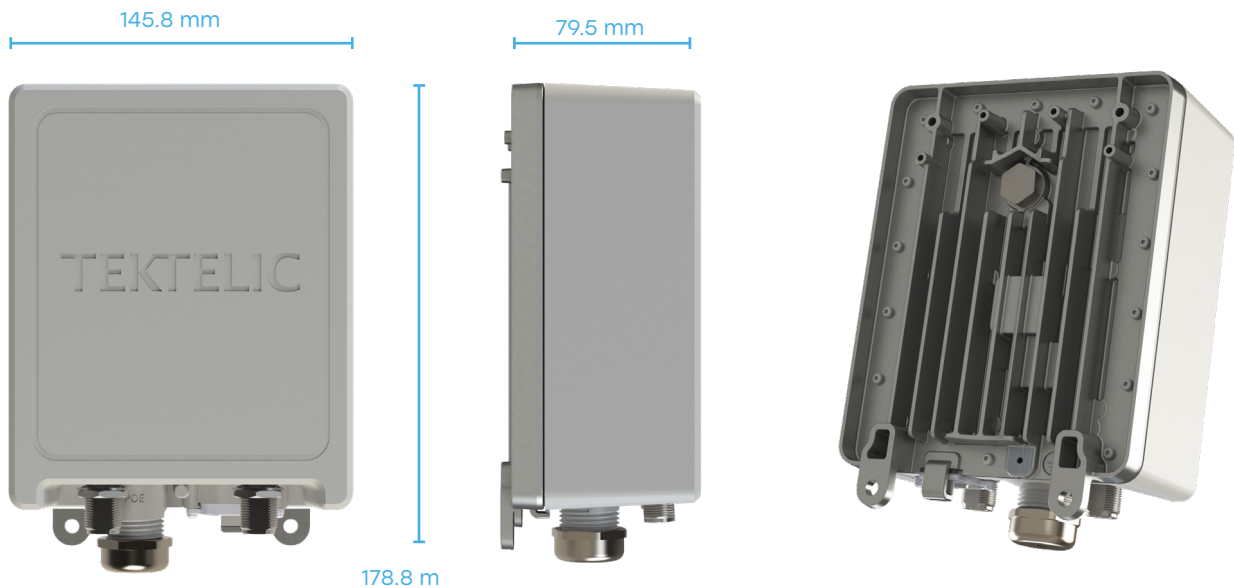

TEKTELIC Communications is a premier supplier of best-in-class LoRaWAN® IoT Gateways, Sensors, and custom applications. These elements combined provide a powerful end-to-end solution that can be easily, quickly, and cost effectively deployed to address the most demanding IoT challenges.

For more information please visit www.tektelic.com